


THE CREATORS OF THE ORIGINAL WIRELESS SAFETY SYSTEM BRING YOU THE NEXT GENERATION OF PRODUCTS


Saving time and enhancing safety reliability with JCM Wireless Safety Systems



Transmitter

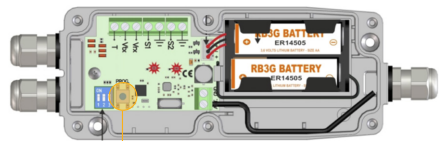

EASY PROGRAMMING
just press two buttons

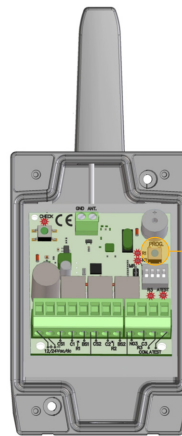

Receiver

RB3 SYSTEM


Wireless transmission of safety edges

RB3 is compatible with all control panels offering 2 selective (NC contact or 8k2 resistive) relay outputs.

- 2 safety edge connections per RB3-T868 (1 if using optical safety edge).
- Nominal maximum range from TX to RX is up to 50M.
- Receiver has built in diagnostics for safety test and range testing.
- Battery life - 2 years (2 x AA 3.6V lithium batteries).
- IP65.
- 5 Years warranty.
- RB3 complies with CAT2 safety standards (when auto test function is used between receiver and control panel).
- Suitable for mechanical, resistive and optical safety edges.



RESISTIVE SAFETY EDGE




ELECTRO-MECHANICAL SAFETY EDGE



STANDARD OPTICAL SAFETY EDGE



PERMANENTLY ACTIVE SAFETY EDGE

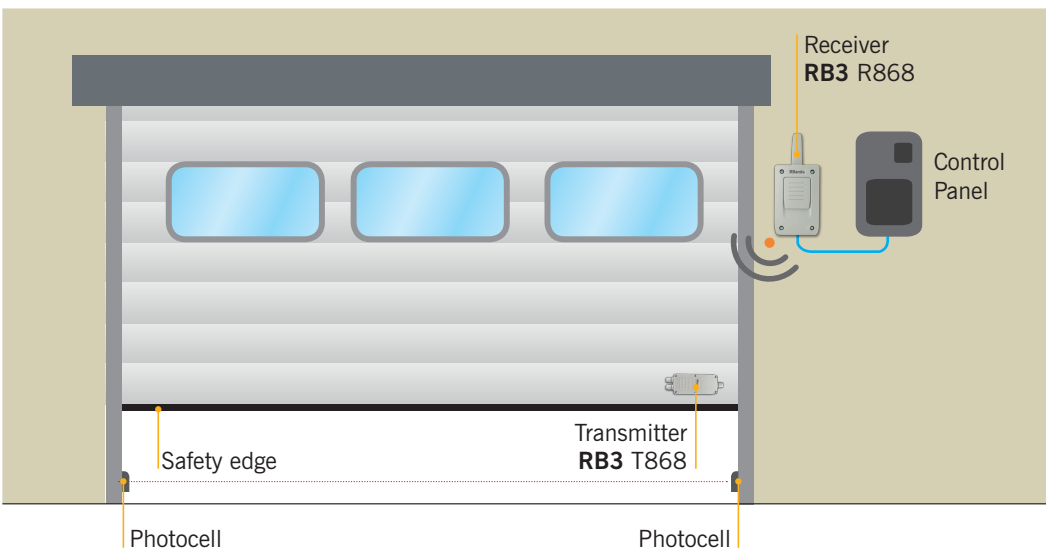

RB3-T868 Transmitter
£50.00 (+VAT)

RB3-R868 Receiver
£50.00 (+VAT)

"Call JCM now to receive a promotional discount".

Valid until the 30th September 2015.